

Dot 45 20W

DOT45X
recessed empotrado

875Lm / 2700K-3000K
IP40 / CRI ≥ 80 / 15° 45°

7lumen
create the light



DESCRIPTION DESCRIPCIÓN

Slim 45mm spot light with best glare reduction UGR<16, Aluminum heatsink with chromated reflector. Suitable for Dimming with TRIAC / DALI / PWM dedicated led drivers. Cost effective with higher life-span. Available in black and white trim colors.

REFERENCES REFERENCIAS

DOT4520/27	2700K	1710Lm	85,5Lm/W
DOT4520/30	3000K	1770Lm	88,5Lm/W

GENERAL

negro black blanco white

recessed empotrado

IP40

IK07

LIGHTING FIXTURE

APARATO DE ILUMINACIÓN

15° 30°

CRI ≥ 80

IP40

MacAdam ≤ 3

UGR <19

difusor transparente

clear diffuser

power values of the system (LED + driver): 20,0W

valores de potencia del sistema (LED + driver): 20,0W

ACCESSORIES ACCESORIOS

no disponible

not available

ELECTRICAL ELÉCTRICA

20W

220-240VAC 50/60Hz

equipo incluido

gear included

MEASURES MEDIDAS

277mm x 45mm

altura: 39mm

height: 39mm

DIMMING REGULACIÓN

on / off

phase-cut dimming IGBT/TRIAC

corte de fase IGBT/TRIAC

1-10V

push

pulsador

DALI

CUTOUT RECORTE

267 x 37mm

min. espesor del techo: 13mm


min. ceiling thickness: 13mm

máx. espesor del techo: 31mm

max. ceiling thickness: 31mm

profundidad empotrada: 55mm

recessed depth: 55mm

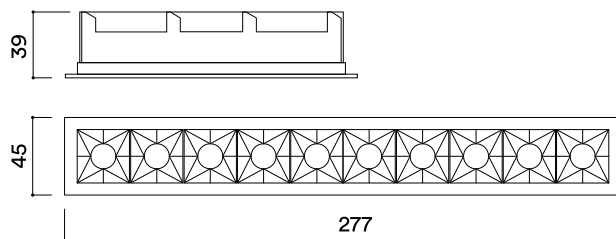

H(m)	D(cm)	Lux	H(m)	D(cm)	Lux
1	27	6363	1	86	1639
2	55	1591	2	172	410
3	82	707	3	258	182

3000K 15° 3000K 45°



change without notice cambio sin previo aviso