

# Tapeled C 10W

TAPELED CX  
surface superficie

780 Lm / 2700K~3000K  
IP20 / CRI ≥ 90 / 120°

**7lumen**  
create the light



## DESCRIPTION DESCRIPCIÓN

Slim dot less led tape with 380 led per meter best suitable for installation in aluminum profile linear lighting in profiles with 3M high grip tape installed for longer period of stickiness.

## REFERENCES REFERENCIAS

TAPELED C10/27	2700K	715Lm	71,5Lm/W
TAPELED C10/30	3000K	780Lm	78,0Lm/W

## GENERAL

with self adhesive tape

con cinta autoadhesiva

surface superficie

Ip20

## LIGHTING FIXTURE

APARATO DE ILUMINACIÓN

120°

CRI ≥ 90

Ip20

MacAdam ≤ 3

UGR <19

difusor transparente

clear diffuser

power values of the system (LED + driver): 11,0W

valores de potencia del sistema (LED + driver): 11,0W

## ACCESSORIES ACCESORIOS

no disponible

not available

## ELECTRICAL ELÉCTRICA

10W

24VDC

gear excluded

equipo excluido

## MEASURES MEDIDAS

10mm

altura: 1.5mm

height: 39mm

## DIMMING REGULACIÓN

on / off

phase-cut dimming IGBT/TRIAC


corte de fase IGBT/TRIAC

1-10V

push

pulsador

DALI

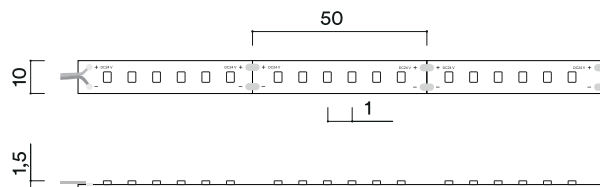

## Regulación - Dimming



## Información adicional - Additional information



change without notice cambio sin previo aviso